

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 December 2001 (20.12.2001)


PCT

(10) International Publication Number
WO 01/96823 A2

- (51) International Patent Classification⁷: **G01J 1/00**
- (21) International Application Number: **PCT/CA01/00877**
- (22) International Filing Date: **18 June 2001 (18.06.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/211,971 16 June 2000 (16.06.2000) **US**
- (71) Applicant: **TROJAN TECHNOLOGIES INC.**
[CA/CA]; 3020 Gore Road, London, Ontario N5V 4T7 (CA).
- (72) Inventors: **ELLIS, James, W.**; 8 Meadowview Road, London, Ontario N6J 4E6 (CA). **SAGES, Mike**; 880 Kipps Lane, London, Ontario N5Y 5K4 (CA). **VAN DOODEWAARD, Peter**; 18 Marlene Street, St. Thomas, Ontario N5R 1B3 (CA). **VERDUN, Alex**; 542 Cayley Drive, London, Ontario N6H 3G6 (CA).
- (74) Agents: **NASSIF, Omar, A. et al.**; Gowling Lafleur Henderson LLP, Suite 4900, Commerce Court West, Toronto, Ontario M5L 1J3 (CA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— *without international search report and to be republished upon receipt of that report*

[Continued on next page]

(54) Title: **OPTICAL RADIATION SENSOR SYSTEM AND METHOD FOR MEASURING RADIATION TRANSMITTANCE OF A FLUID**

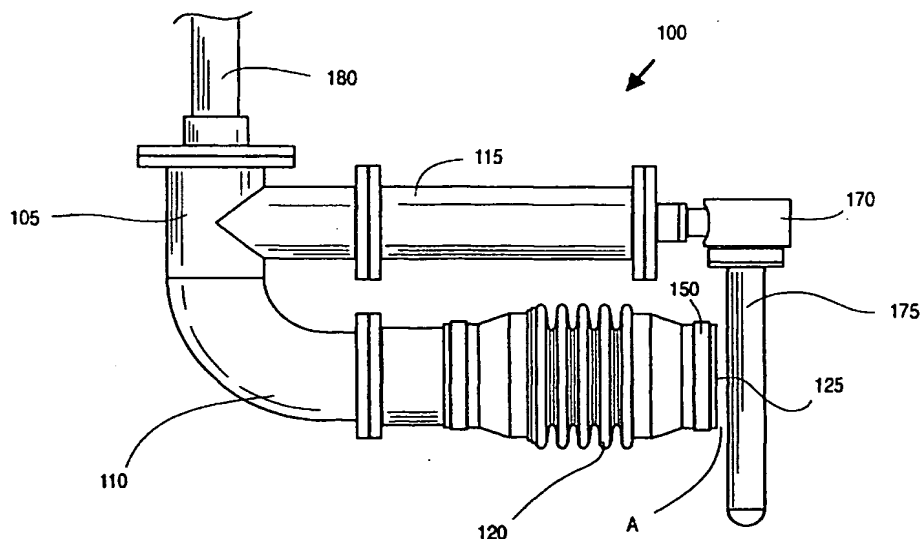

(57) Abstract: An optical radiation sensor device for detecting radiation in a radiation field having a thickness. A preferred embodiment of the device includes a radiation source and a radiation sensor element positioned to receive radiation from the radiation source. A motor (or other motive means) is provided to alter the thickness of the radiation field from a first thickness to a second thickness. The sensor element is capable of detecting and responding to incident radiation from radiation source at the first thickness and at the second thickness. The optical radiation sensor device allows for determination of radiation (preferably ultraviolet radiation) transmittance of a fluid of interest.

BEST AVAILABLE COPY

WO 01/96823 A2



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

-1-

OPTICAL RADIATION SENSOR SYSTEM AND METHOD FOR
MEASURING RADIATION TRANSMITTANCE OF A FLUID

TECHNICAL FIELD

5 In one of its aspects, the present invention relates to an optical radiation sensor system. In another of its aspects, the present invention relates to a method for measuring radiation transmittance of a fluid.

BACKGROUND ART

10 Optical radiation sensors are known and find widespread use in a number of applications. One of the principal applications of optical radiation sensors is in the field of ultraviolet radiation fluid disinfection systems.

It is known that the irradiation of water with ultraviolet light will disinfect the water by inactivation of microorganisms in the water, provided the irradiance and exposure duration are above a minimum "dose" level (often measured in units of milliWatt seconds per square centimetre or $\text{mW}\cdot\text{s}/\text{cm}^2$). Ultraviolet water disinfection units such as those commercially available from Trojan Technologies Inc. under the tradenames Trojan UVMax™, Trojan UVSwift™ and Trojan UVLogic™, employ this principle to disinfect water for human consumption. Generally, water to be disinfected passes through a pressurized stainless steel cylinder which is flooded with ultraviolet radiation. Large scale municipal waste water treatment equipment such as that commercially available from Trojan Technologies Inc. under the tradenames UV3000 and UV4000, employ the same principal to disinfect waste water. Generally, the practical applications of these treatment systems relates to submersion of a treatment module or system in an open channel wherein the wastewater is exposed to radiation as it flows past the lamps. For further discussion of fluid disinfection systems employing ultraviolet radiation, see any one of the following:

20
25
30

United States patent 4,482,809,

United States patent 4,872,980,

United States patent 5,006,244,

United States patent 5,418,370,

-2-

United States patent 5,539,210, and
United States patent Re36,896.

5 In many applications, it is desirable to monitor the level of ultraviolet radiation present within the water (or other fluid) under treatment or other investigation. In this way, it is possible to assess, on a continuous or semi-continuous basis, the level of ultraviolet radiation, and thus the overall effectiveness and efficiency of the disinfection process.

10 It is known in the art to monitor the ultraviolet radiation level by deploying one or more passive sensor devices near the operating lamps in specific locations and orientations which are remote from the operating lamps. These passive sensor devices may be photodiodes, photoresistors or other devices that respond to the impingent of the particular radiation wavelength or range of radiation wavelengths of interest by producing a repeatable signal level (e.g., in
15 volts or amperes) on output leads.

In most commercial ultraviolet water disinfection systems, the single largest operating cost relates to the cost of electricity to power the ultraviolet radiation lamps. In a case where the transmittance of the fluid varies from time to time, it would be very desirable to have a convenient means by which fluid
20 transmittance could be measured for the fluid being treated by the system (or the fluid being otherwise investigated) at a given time. If it is found that fluid transmittance is relatively high, it might be possible to reduce power consumption in the lamps by reducing the output thereof. In this way, the significant savings in power costs would be possible.

25 The measurement of fluid transmittance is desirable since measurement of intensity alone is not sufficient to characterize the entire radiation field - i.e., it is not possible to separate the linear effects of lamp aging and fouling from exponential effects of transmittance. Further, dose delivery is a function of the entire radiation field, since not all fluid takes the same path.

30 The prior art has endeavoured to develop reliable radiation (particularly UV) transmittance measuring devices.

-3-

For example, it is known to use a single measurement approach. Unfortunately, the single measurement distance requires re-calibration with fluid of known transmittance to account for fouling.

It is also known to use a two-sensor system in which a first sensor is
5 disposed in air and a second sensor is disposed in water. The problem with this approach is that it results in different fouling of each sensor with resulting errors.

Further, some systems require obtaining a sample from a channel of flowing fluid and thereafter measuring the radiation transmittance of the sample. Unfortunately, this approach necessitates the use of additional fluid handling
10 measures which can lead to non-representative samples.

Thus, despite the advances made in the art, there exists a need for an improved device which can measure radiation transmittance of a fluid. Ideally, the device would have one or more of the following characteristics: it would be of simple construction, it would be submersible, it would require only a single
15 sensor and it could be implemented to measure UV transmittance of a fluid in an on-line or random measurement manner.

DISCLOSURE OF THE INVENTION

It is an object of the present invention to provide a novel optical sensor
20 device which obviates or mitigates at least one of the above-mentioned disadvantages of the prior art.

It is another object of the present invention to provide a novel radiation source module which obviates or mitigates at least one of the above-mentioned disadvantages of the prior art.

It is another object of the present invention to provide a novel process for
25 measuring the transmittance of a fluid in a radiation field.

Accordingly, in one of its aspects, the present invention provides an optical radiation sensor device for detecting radiation in a radiation field having a thickness, the device comprising:

30 a radiation source;
a radiation sensor element positioned to receive radiation from the radiation source; and

-4-

motive means to alter the thickness of the radiation field from a first thickness to a second thickness;

the sensor element capable of detecting and responding to incident radiation from radiation source at the first thickness and at the second thickness.

5 In another of its aspects, the present invention provides a process for measuring transmittance of a fluid in a radiation field, the process comprising the steps of:

- (i) positioning a radiation source and a radiation sensor element in a spaced relationship to define a first thickness of fluid in the radiation field;
- 10 (ii) detecting a first radiation intensity corresponding to radiation received by the sensor element at the first thickness;
- (iii) altering the first thickness to define a second thickness;
- (iv) detecting a second radiation intensity corresponding to radiation received by the sensor element at the second thickness; and
- 15 (v) calculating radiation transmittance of the fluid in the radiation field from the first radiation intensity and the second radiation intensity.

In another of its aspects, the present invention provides an optical radiation sensor device for detecting radiation in a radiation field generated in a fluid of interest, the device comprising:

- 20 a radiation source submersible in the fluid of interest;
- a submersible first radiation sensor element positioned in the fluid of interest at a first distance from the radiation source; and
- a submersible second radiation sensor element positioned in the fluid of interest at a second distance from the radiation source;
- 25 wherein: (i) the first distance is different from the second distance, (ii) the first radiation sensor element is capable of detecting and responding to incident radiation from radiation source at the first distance, and (iii) the second radiation sensor element is capable of detecting and responding to incident radiation from radiation source at the second distance.

30 Thus, the present inventors have discovered a novel optical sensor device which, in a preferred embodiment is simplified in construction in that it only requires a single lamp and single sensor element. The sensor element and

-5-

radiation source (preferably an ultraviolet radiation lamp) are arranged to create a fluid layer therebetween. By altering the thickness of the fluid layer, it is possible to take multiple (i.e., two or more) radiation intensity readings at multiple, known fluid layer thicknesses. Once these are achieved, using
5 conventional calculations, it is possible to readily calculate the radiation transmittance of the fluid. A process for measuring transmittance of a fluid is also described for implementation of the present optical radiation sensor device. Other advantages will become apparent to those of skill in the art.

10 BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the present invention will be described with reference to the accompanying drawings, in which:

Embodiments of the present invention will be described with reference to the accompanying drawings, in which:

15 Figure 1 illustrates a side elevation view of an embodiment of the present optical radiation sensor device;

Figure 2 illustrates a cross-sectional view of the device illustrated in Figure 1;

20 Figure 3 illustrates an alternate embodiment of the optical radiation sensor device illustrated in Figure 2;

Figure 4 illustrates a further alternate embodiment to the optical radiation sensor device illustrated in Figure 2;

Figure 5 illustrates a cross-sectional view of an alternate embodiment of the present optical radiation sensor device;

25 Figure 6 illustrates yet a further alternate embodiment of the optical radiation sensor device illustrated in Figure 2; and

Figure 7 illustrates yet a further alternate embodiment of the optical radiation sensor device illustrated in Figure 2.

30

-6-

BEST MODE FOR CARRYING OUT THE INVENTION

With reference to Figures 1 and 2, there is illustrated an optical radiation sensor device 100. Sensor device 100 comprises a fluid tight housing 105 which comprises a sensor housing 110 and a radiation source housing 115.

5 Sensor housing 110 has attached to a terminal portion thereof a boot 120. Boot 120 can be made of any suitable flexible material which is fluid tight and can withstand the rigours of the radiation environment in which it is used. For example, boot 120 may be constructed of Neoprene™, Viton™ and the like. Boot 120 may be sealably attached to the terminal end of sensor housing 110 in
10 any conventional manner (not shown). Disposed at the distal end of boot 120 is a radiation transparent window 125.

Disposed within sensor housing 110 is a motor 130. Also disposed within sensor housing 110 is a slidable first disk 135 which is connected to a pair of rods 140,145. Rods 140,145 are, in turn, connected a second disk 150 having disposed
15 therein radiation transparent window 125. Disposed between rods 140,145 is an optical sensor 155 which contains a photodiode (not shown) or other radiation sensor material. The sensor itself may be chosen from conventional sensors. For example, a suitable sensor is commercially available from IFW (Germany).

As illustrated, a screw rod 160 interconnects motor 130 and first disk 135.
20 Disposed within radiation source housing 115 is a ballast 165 conventionally used to control a radiation source such as an ultraviolet lamp.

A connection block 170 is connected to the distal end of radiation source housing 115 in a fluid tight manner.

A radiation source 175 emanates from and is in a fluid tight engagement
25 with connection block 170. Radiation source 175 is conventional. Preferably, radiation source 175 is an ultraviolet radiation lamp, more preferably such a lamp encased in a radiation transparent protective sleeve (e.g., a sleeve made of quartz).

As will be apparent and appreciated by those of skill in the art, it is
30 conventional to have a electrical leads emanating from motor 130, optical sensor 155 and ballast 165 through sensor housing 110 and radiation source housing 115, respectively, and then through a fluid tight conduit 180. For clarity and

-7-

understanding the illustrated embodiment, the electrical leads have not been shown. Thus, those of skill in the art will recognize that illustrated optical radiation sensor device 100 is designed to be entirely submersible in the fluid of interest.

5 As will be apparent, fluid passing through optical sensor device 100 will, at least in part, pass through a gap A created between second disk 150 and radiation source 175. In other places in the specification, this gap is referred to as a fluid layer, particularly a fluid layer having a specific thickness.

10 The fluid layer thickness between disk 150 and radiation source 175 may be altered in the following manner. Motor 130 is actuated thereby actuating screw rod 160 which will serve to retract first disk 135 and rods 140,145 into sensor housing 110. This has the effect of increasing the thickness of gap A between second disk 150 and radiation source 175 or, in other words, increasing the thickness of the fluid layer.

15 Through the use of conventional stepper motors, position sensors, mechanical constraints (e.g., fixture travel means such as a solenoid, a cam, a crank shaft, physical stops and other relatively simple mechanical constructions) or the like, it is possible to take measurements of the radiation intensity detected by sensor 155 at various, known values for gap A. Once various intensities at
20 various gaps are known, the radiation transmittance of fluid passing through optical radiation sensor device 100 may be readily determined as will be explained hereinbelow.

 As will be appreciated by those with skill in the art, in the embodiment illustrated in Figures 1 and 2, sensor 155 and radiation source 175 are stationary.
25 Specifically, the fluid layer thickness is altered by movement of second disk 150 with respect to radiation source 175.

 Figures 3 and 4 illustrate alternate embodiments for varying the thickness of the fluid layer. In Figures 1-4, like reference numerals designate like elements. In Figure 3, the reference numerals for elements which have been moved and/or
30 modified from Figure 1 carry the suffix "a". Similarly, in Figure 4, the reference numerals for elements which have been moved and/or modified from Figure 1 carry the suffix "b".

-8-

With reference to Figure 3, it will be seen that the distal end of sensor housing 110 has been modified to include a body 185 within which sensor 155a is movable. Movement of sensor 155a may be accomplished by placing a motor 130a which is interconnected to sensor 155a via a screw rod 160a. When it is
5 desired to alter the thickness of the fluid layer, motor 130a is actuated thereby actuating screw rod 160a which, depending on the rotation of screw rod 160a, will result in sensor 155a being moved toward or away from radiation source 175.

With reference to Figure 4, there is illustrated yet another embodiment for altering the thickness of the fluid layer referred to above. In this case, radiation
10 sensor 155 having a face 156 is stationary and radiation source 175 may be moved thereby altering the thickness of the fluid layer between sensor 155 and radiation source 175. Movement of radiation source 175 may be accomplished by placing a motor 130b which is interconnected to a connection block 170 via a screw rod 160b. The thickness of the fluid layer between face 156 and radiation
15 source 175 may be altered in the following manner. Motor 130b is actuated thereby actuating screw rod 160b which, depending on the rotation of screw rod 160b, will serve to: (i) retract radiation source 175 and rods 140b, 145b into radiation source housing 115, or (ii) extend radiation source 175 and rods 140b, 145b from radiation source housing. This has the effect of increasing the
20 thickness of gap A between face 156 and radiation source 175 or, in other words, increasing the thickness of the fluid layer.

With reference to Figure 5, there is illustrated an optical radiation sensor device 200 which is an alternate embodiment of the present optical radiation sensor device.

25 Thus, device 200 comprises a housing 205 which is substantially fluid-tight. Housing 205 comprises a wall 210 having attached thereto a plate 212. Disposed in plate 212 is a first radiation sensor 215 and a second radiation sensor 220. Radiation sensor 215 is maintained in fluid tight engagement with plate 212 via an O-ring 217. Radiation sensor 220 is maintained in fluid tight engagement
30 with plate 212 via an O-ring 222.

A bracket 225 is attached to plate 212 and wall 210 via a bolt 230. A bolt 235 serves to further secure plate 212 to wall 210.

-9-

Attached to bracket 225 is a radiation source assembly 240. Radiation source assembly 240 comprises a radiation source 245 disposed within a radiation transparent protective sleeve 250. As illustrated, protective sleeve 250 is closed at one end and opened at the other. Disposed in the open end of protective sleeve 250 is a plug 255 against which the open end of protective sleeve 250 abuts. An O-ring 260 is provided in plug 255 a coupling nut 265 and a sleeve 270 are in threaded (or other) engagement such that when coupling nut 265 is tightened, sleeve 270 is biased against plug 255 which serves to compress O-ring 260 thereby creating a fluid-tight arrangement.

As illustrated in Figure 5, first sensor 215 and second sensor 220 have respective faces which are disposed at different distances from radiation source assembly 240. As will be understood by those of skill in the art, the sensor elements (not shown) disposed with in each of first sensor 215 and second sensor 220 may be detecting radiation at the same or different distance - i.e., it is difference in the respective fluid layer thickness between radiation source 245 and first sensor 215 and between radiation source 245 and second sensor 220 which is important. Thus, device 200 is able to feed back radiation intensity readings at two distances from the radiation source.

Figure 6 illustrates yet a further alternate embodiment to the device illustrated in Figure 2 for varying the thickness of the fluid layer. In Figures 2 and 6, like reference numerals designate like elements. In Figure 6, the reference numerals for elements which have been moved and/or modified from Figure 2 carry the suffix "c".

Thus, with reference to Figure 6, the principal change to the embodiment illustrated in Figure 2 is the presence of a flat panel radiation source 175c.

With reference to Figure 7, there is illustrated a portion of a radiation source module 300. As will be apparent to those of skill in the art, radiation source module 300 is of a design similar to that described in any one of United States patents 4,482,809, 4,872,980 and 5,006,244 referred to hereinabove. Thus, radiation source module 300 comprises a first support leg 305 and a second support leg 310. In the illustrated embodiment, second support leg 310 comprises a pair of split plates which are held together to surround a portion of a pair of

-10-

sleeves 315,320. Each of sleeves 315,320 is made of a radiation transparent material such as quartz.

First support leg 305 further comprises a pair of sockets 325,330 welded (or otherwise connected) thereto for receiving the open ends of sleeves 315,320, respectively. A pair of coupling nuts 335,340 are used to connect sleeves 315,320, respectively, to sockets 325,330, respectively, in a substantially fluid-tight manner. The specific design and sealing mechanisms are set out in various of the patents referred to above and thus, are within the perview of a person skilled in the art.

Disposed within sleeve 315 is a radiation source (not shown) such as an ultraviolet lamp. The electrical leads for the radiation source disposed within sleeve 315 are fed through socket 325 and support leg 305 to a source of electricity (not shown).

Sleeve 320 comprises a radiation sensor 345 which is capable of being moved within sleeve 320 along a guide 350 via a motor 355 or other suitable motive means.

As illustrated in Figure 7, sleeves 315,320 are in a skewed or substantially non-parallel relationship with respect to each other. Thus, in this relationship, it would be apparent that, when sensor 345 is moved along guide 350, the fluid layer thickness between sensor 345 and sleeve 315 (and thus the distance from sensor 345 to the radiation source disposed within sleeve 315) can be varied, for example between a first fluid layer thickness A and a second fluid layer thickness B. Thus, in this embodiment, motor 355 (or other suitable motive means) alters the fluid layer thickness between the radiation source and the radiation sensor by moving the latter longitudinally with respect to the former in a non-parallel manner.

In summary, the embodiment illustrated in Figure 5 comprises the use of a pair of static sensors whereas the embodiments illustrated in Figures 1-4 and 6 and 7 illustrate the use of a single sensor in a dynamic manner. The common feature is that the embodiments illustrated in Figures 1-7 provide for obtaining intensity readings from at least two distances from a radiation source in question. These intensity readings each represent a measurement of the radiation detected

-11-

by a sensor at each (two or more) fluid layer thickness - each thickness is defined by the distance between a sensor and a radiation source. Once this is done, radiation (preferably ultraviolet radiation) transmittance analysis may be achieved as follows.

5 Consider a system comprising a single lamp and a single sensor. A fluid layer is provided between the lamp and sensor. The lamp has an intensity at its surface of I_o . The thickness of the fluid layer is varied from between thickness x and fluid thickness y . These distances are readily determined by feedback from the motor or other motive means, by measurement, by the design of the optical radiation sensor system and/or by the design of the disinfection system.

10 The sensor optics may be designed to accept radiation from a single known plane or location on a source, which means that all light reaching the sensor has travelled substantially the same distance. It is known that the sensor output, S_d , for light arriving from a source through fluid thickness d is given by the equation

$$S_d = I_o k_a k_g f_l f_s e^{-kd}$$

20 where I_o is the intensity at the lamp, k_a is the gain factor of the sensor, k_g is a geometrical factor, f_l is the reduction due to fouling at the lamp sleeve, f_s is the reduction due to fouling at the sensor window, and k is the fluid absorbance with units of 1/distance. The geometrical factor may be held constant through careful design of the sensor window, apertures and lenses.

25 Taking intensity readings at two fluid thicknesses, x and y , and taking the ratio of these two readings results in the following equation:

$$\frac{S_x}{S_y} = e^{k(y-x)}$$

30

Note that all factors including lamp output, sensor gain, and fouling have cancelled and do not appear in this equation. The two sensor readings and the

-12-

fluid thicknesses are known, enabling the calculation of the fluid absorbance or transmittance.

The foregoing discussion is particularly applicable to the case where a single sensor and single lamp is used (e.g., the embodiments of Figures 1-4 and 5 6-7), but is readily adapted to the case where two sensors are used (e.g., the embodiment of Figure 5) by calculating S_d for each of the two sensors. The reason for this is that lamp output, sensor gain and/or fouling may not cancel as described in the preceding paragraph.

Those of skill in the art will also recognize that the Beer-Lambert law, 10 from which the foregoing discussion derives, may also be written in terms of logarithms in base 10, or directly in terms of transmittance. The general principle behind determining the absorbance or transmittance is the same as described above.

Those skilled in the art will recognize that, for clarity, various 15 simplifications have been made to facilitate clear presentation of the concepts above. Standard modeling and more sophisticated calculation can be used to account for deviations from the ideal described above.

While the present invention has been described with reference to preferred and specifically illustrated embodiments, it will of course be understood by those 20 skilled in the arts that various modifications to these preferred and illustrated embodiments may be made without departing from the spirit and scope of the invention. For example, the present invention has been illustrated with reference to a "stand alone" radiation source module which can be used to measure the radiation (preferably ultraviolet radiation) transmittance of fluid in any radiation 25 treatment module and/or system such as one similar in overall design to those described in United States patents 4,872,980, 5,006,244, 5,418,370, 5,539,210 and Re36,896. As such, the "stand alone" radiation source module may be a temporarily or permanently installed in the fluid treatment system. Further, it is, of course, possible to incorporate the approach described above with the 30 specifically illustrated embodiments in an actual radiation source module which forms part of the fluid treatment system such as those described in the above-mentioned United States patents. Still further, it is possible to employ the present

-13-

optical radiation sensor system in a fluid treatment device such as those commercially available from Trojan under the tradenames Trojan UVMax™, Trojan UVSwift™ and Trojan UVLogic™ etc. Still further, while it is most preferred to use the present invention with respect to treatment of liquids such as water, (i.e., wastewater), it is possible to utilize the present optical radiation sensor system in a gas treatment system. Still further, it may be possible, in some applications to omit a protective sleeve (e.g., made out of quartz) for radiation source 175. Other modifications which do not depart from the spirit and scope of the present invention will be apparent to those with skill in the art.

All publications, patents and patent applications referred to herein are incorporated by reference in their entirety to the same extent as if each individual publication, patent or patent application was specifically and individually indicated to be incorporated by reference in its entirety.

-14-

What is claimed is:

1. An optical radiation sensor device for detecting radiation in a radiation field having a thickness, the device comprising:
 - a radiation source;
 - a radiation sensor element positioned to receive radiation from the radiation source; and
 - motive means to alter the thickness of the radiation field from a first thickness to a second thickness;
 - the sensor element capable of detecting and responding to incident radiation from radiation source at the first thickness and at the second thickness.
2. The optical sensor device defined in claim 1, wherein the thickness is defined by a distance between the radiation source and the radiation sensor.
3. The optical sensor device defined in claim 2, wherein the motive means alters the relative distance between the radiation source and the radiation sensor from a first distance to a second distance.
4. The optical sensor device defined in any one of claims 2-3, wherein the radiation source is stationary and the motive means moves the sensor element.
5. The optical sensor device defined in any one of claims 2-3, wherein the sensor element is stationary and the motive means moves the radiation source.
6. The optical sensor device defined in any one of claims 2-5, wherein the motive means alters the relative linear distance between the radiation source and the radiation sensor.
7. The optical sensor device defined in claim 1, wherein the thickness is defined by a distance between a boundary element and the radiation source

-15-

8. The optical sensor device defined in claim 7, wherein the motive means alters the relative distance between the boundary element and the radiation source from a first distance to a second distance.
9. The optical sensor device defined in any one of claims 7-8, wherein the radiation source is stationary and the motive means moves the boundary element.
10. The optical sensor device defined in any one of claims 7-8, wherein the boundary element is stationary and the motive means moves the radiation source.
11. The optical sensor device defined in any one of claims 7-10, wherein the motive means alters the relative linear distance between the boundary element and the radiation source.
12. The optical sensor device defined in any one of claims 7-11, wherein the sensor element is stationary.
13. The optical sensor device defined in any one of claims 1-12, wherein the motive means alters the thickness of the radiation field in a step-wise manner.
14. The optical sensor device defined in any one of claims 1-12, wherein the motive means alters the thickness of the radiation field in a continuous manner.
15. The optical sensor device defined in any one of claims 1-14, wherein the device is submersible in a fluid of interest.
16. The optical sensor device defined in any one of claims 1-14, wherein the device is submersible in a liquid of interest.
17. The optical sensor device defined in any one of claims 1-14, wherein the device is submersible in water.

-16-

18. A radiation source module comprising the optical sensor device defined in any one of claims 1-17.

19. A fluid treatment system comprising the optical sensor device defined in any one of claims 1-17.

20. A water treatment system comprising the optical sensor device defined in any one of claims 1-17.

21. A water disinfection system comprising the optical sensor device defined in any one of claims 1-17.

22. A process for measuring transmittance of a fluid in a radiation field, the process comprising the steps of:

- (i) positioning a radiation source and a radiation sensor element in a spaced relationship to define a first thickness of fluid in the radiation field;
- (ii) detecting a first radiation intensity corresponding to radiation received by the sensor element at the first thickness;
- (iii) altering the first thickness to define a second thickness;
- (iv) detecting a second radiation intensity corresponding to radiation received by the sensor element at the second thickness; and
- (v) calculating radiation transmittance of the fluid in the radiation field from the first radiation intensity and the second radiation intensity.

23. The process defined in claim 22, wherein Step (iii) comprises altering the relative distance between the radiation source and the radiation sensor from a first distance corresponding to the first thickness to a second distance corresponding to the second distance.

24. The process defined in any one of claims 22-23, wherein Step (iii) comprises moving the sensor element while keeping the radiation source stationary.

-17-

25. The process defined in any one of claims 22-23, wherein Step (iii) comprises moving the radiation source while keeping the sensor element stationary.

26. The process defined in any one of claims 23-25, wherein Step (iii) comprises altering the relative linear distance between the radiation source and the radiation sensor.

27. The process defined in claim 22, wherein Step (i) comprises interposing a boundary element between the sensor element and the radiation source to define the first thickness between the boundary element and the radiation source

28. The process defined in claim 27, wherein Step (iii) comprises altering the relative distance between the boundary element and the radiation source from a first distance corresponding to the first thickness to a second distance corresponding to the second distance.

29. The process defined in any one of claims 27-28, wherein Step (iii) comprises moving the boundary element while keeping the radiation source stationary.

30. The process defined in any one of claims 27-28, wherein Step (iii) comprises moving the radiation source while keeping the boundary element stationary.

31. The process defined in any one of claims 27-30, wherein Step (iii) comprises altering the relative linear distance between the radiation source and the radiation sensor.

32. The process defined in any one of claims 27-31, wherein the sensor element is stationary.

-18-

33. The process defined in any one of claims 27-32, wherein Step (iii) comprises altering the first thickness of the radiation field in a step-wise manner.

34. The process defined in claim 27-32, wherein Step (iii) comprises altering the first thickness of the radiation field in a continuous manner.

35. An optical radiation sensor device for detecting radiation in a radiation field generated in a fluid of interest, the device comprising:

a radiation source submersible in the fluid of interest;

a submersible first radiation sensor element positioned in the fluid of interest at a first distance from the radiation source; and

a submersible second radiation sensor element positioned in the fluid of interest at a second distance from the radiation source;

wherein: (i) the first distance is different from the second distance, (ii) the first radiation sensor element is capable of detecting and responding to incident radiation from radiation source at the first distance, and (iii) the second radiation sensor element is capable of detecting and responding to incident radiation from radiation source at the second distance.

36. A radiation source module comprising the optical sensor device defined in claim 35.


37. A fluid treatment system comprising the optical sensor device defined in claim 35.

38. A water treatment system comprising the optical sensor device defined in claim 35.

39. A water disinfection system comprising the optical sensor device defined in claim 35.

1/7


Figure 1

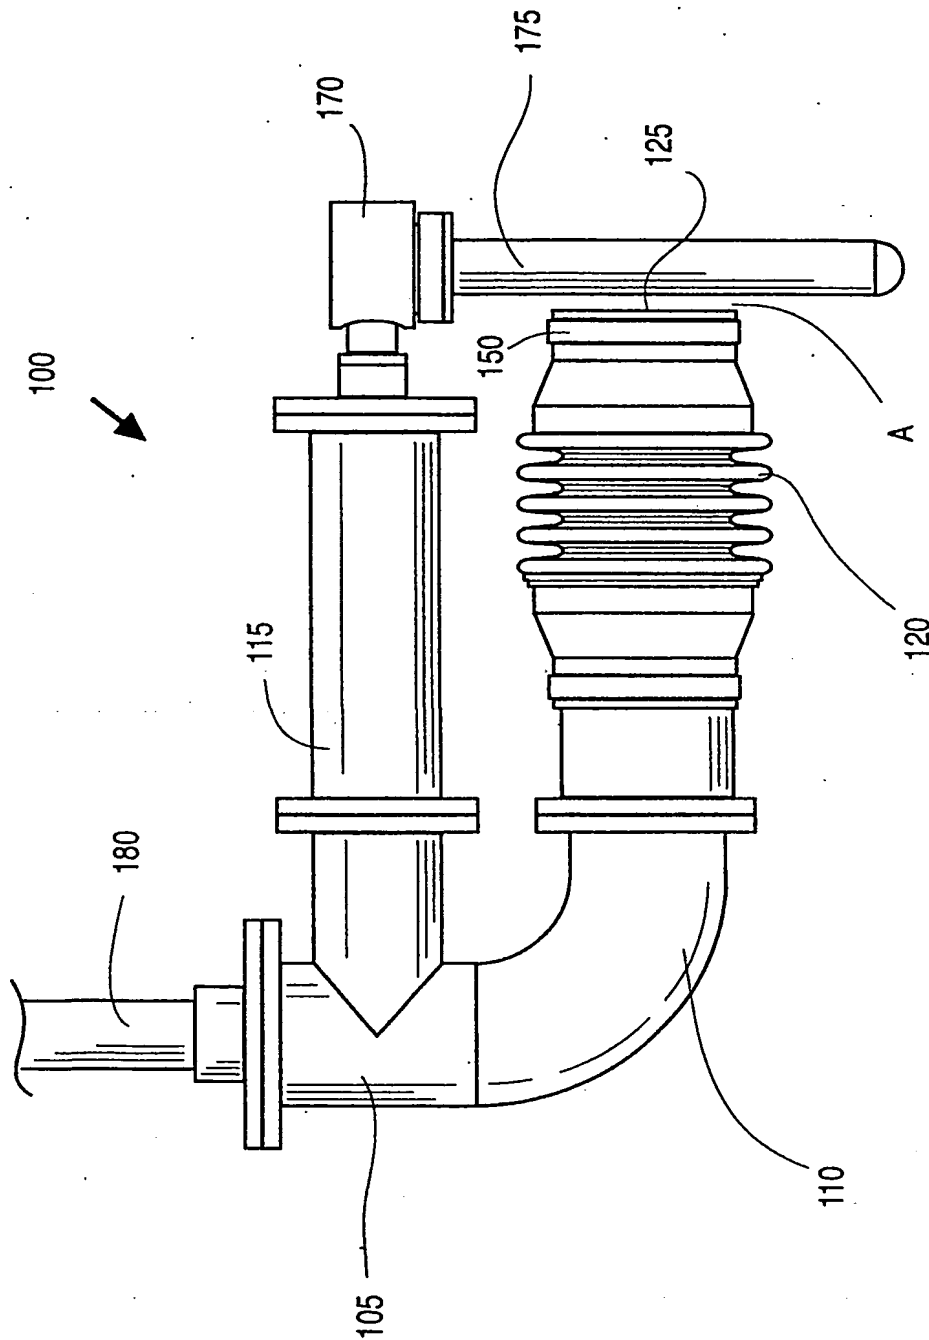

BEST AVAILABLE COPY

2/7


Figure 2

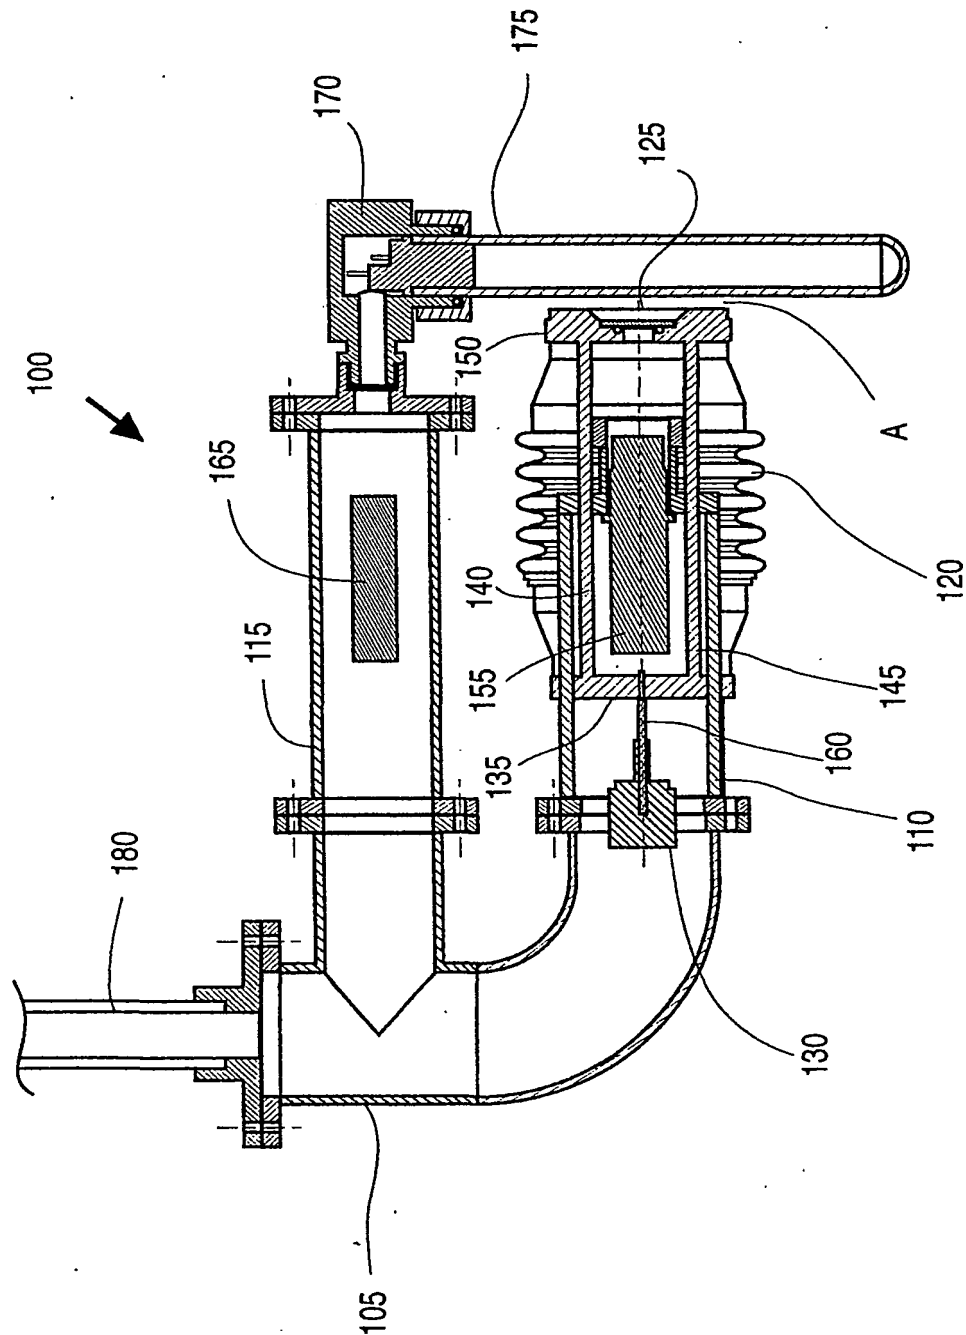

BEST AVAILABLE COPY


3/7

Figure 3

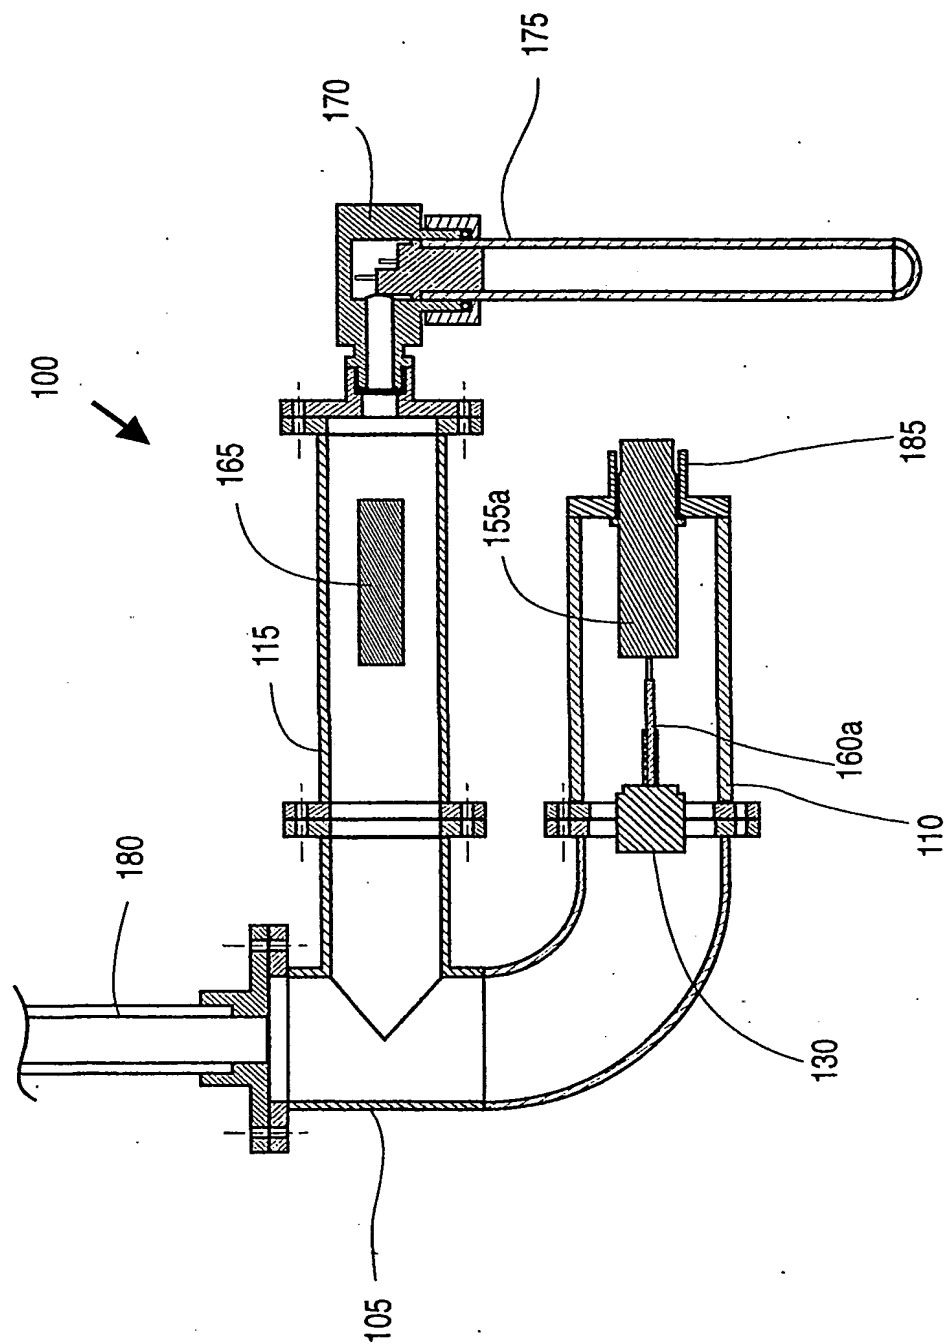

BEST AVAILABLE COPY


Figure 4

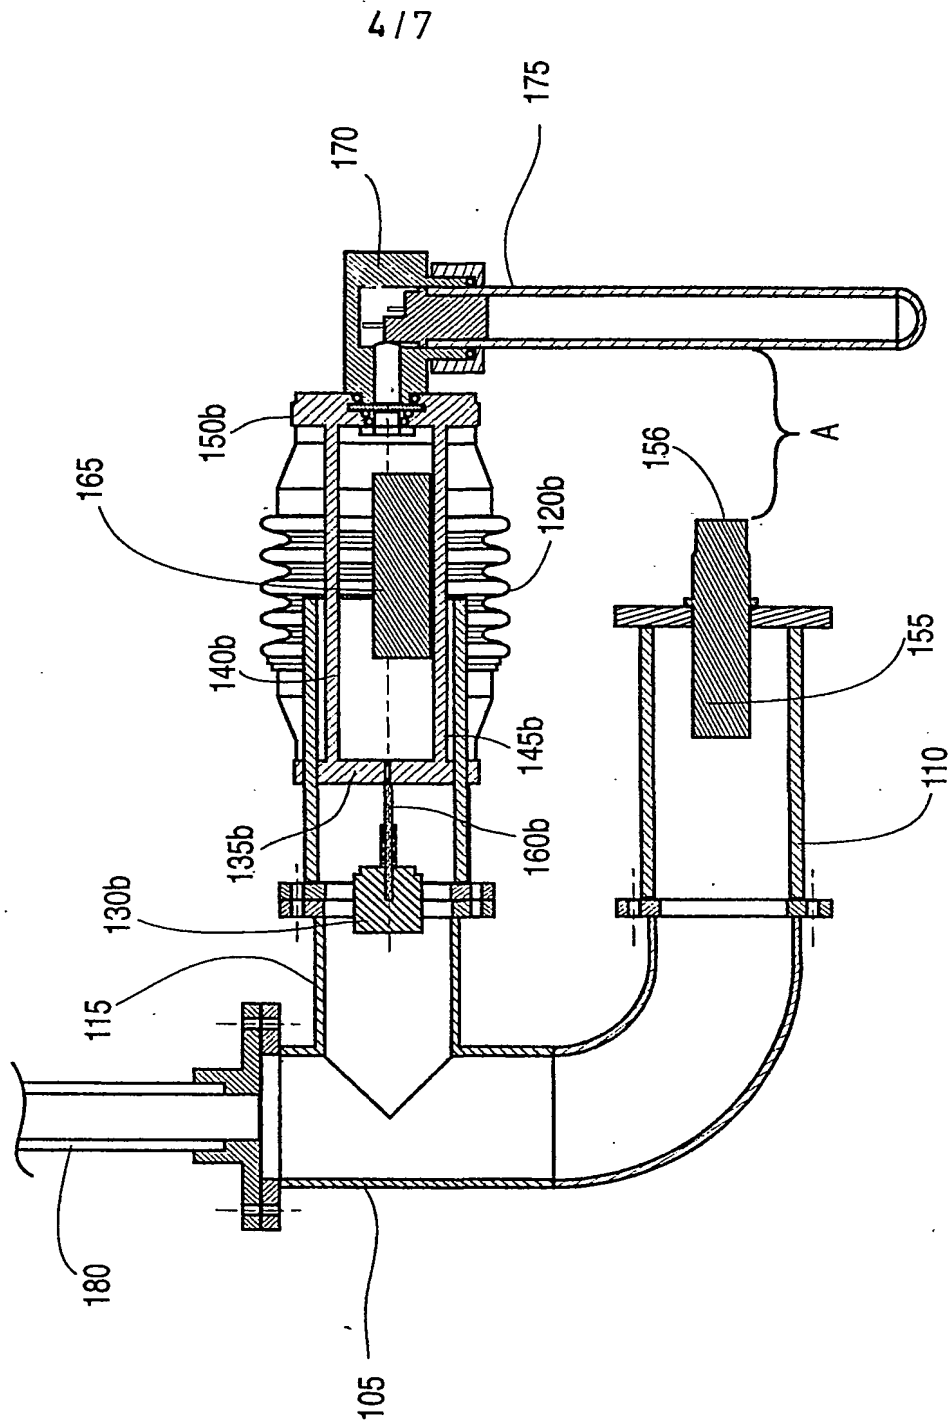

BEST AVAILABLE COPY

5/7


Figure 5

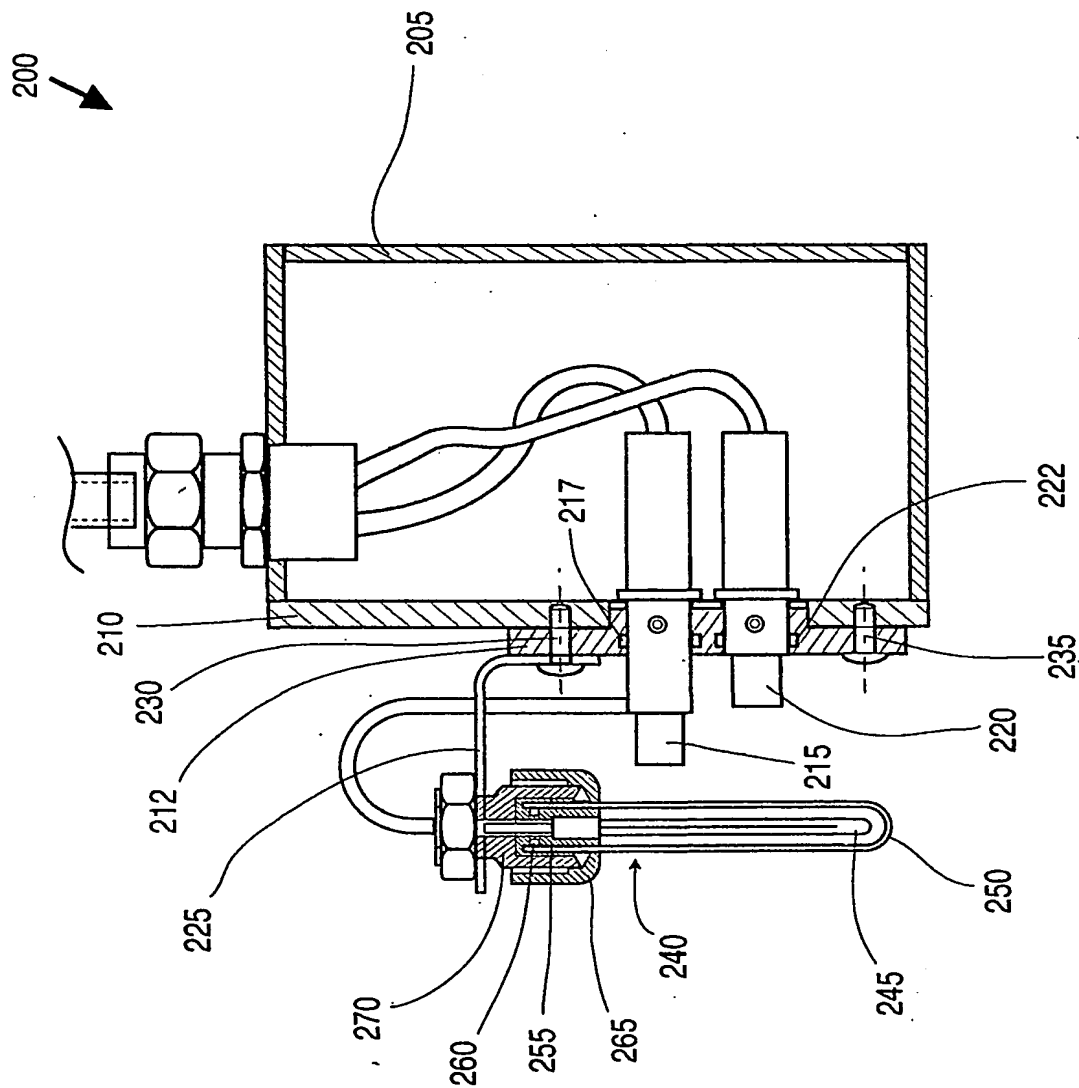

BEST AVAILABLE COPY


6/7

Figure 6

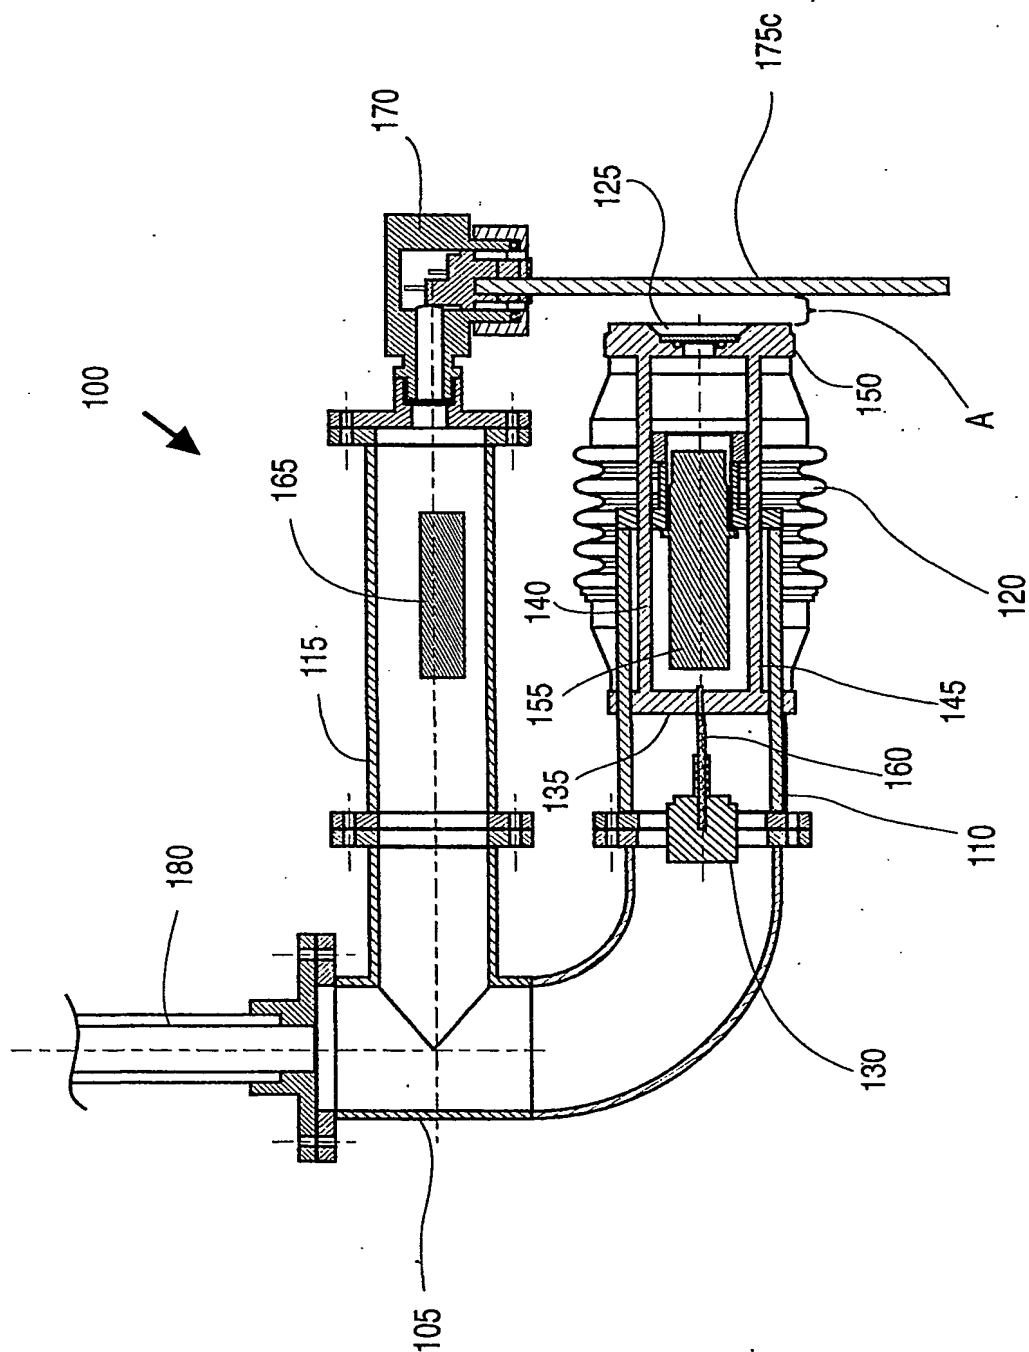

BEST AVAILABLE COPY

Figure 7

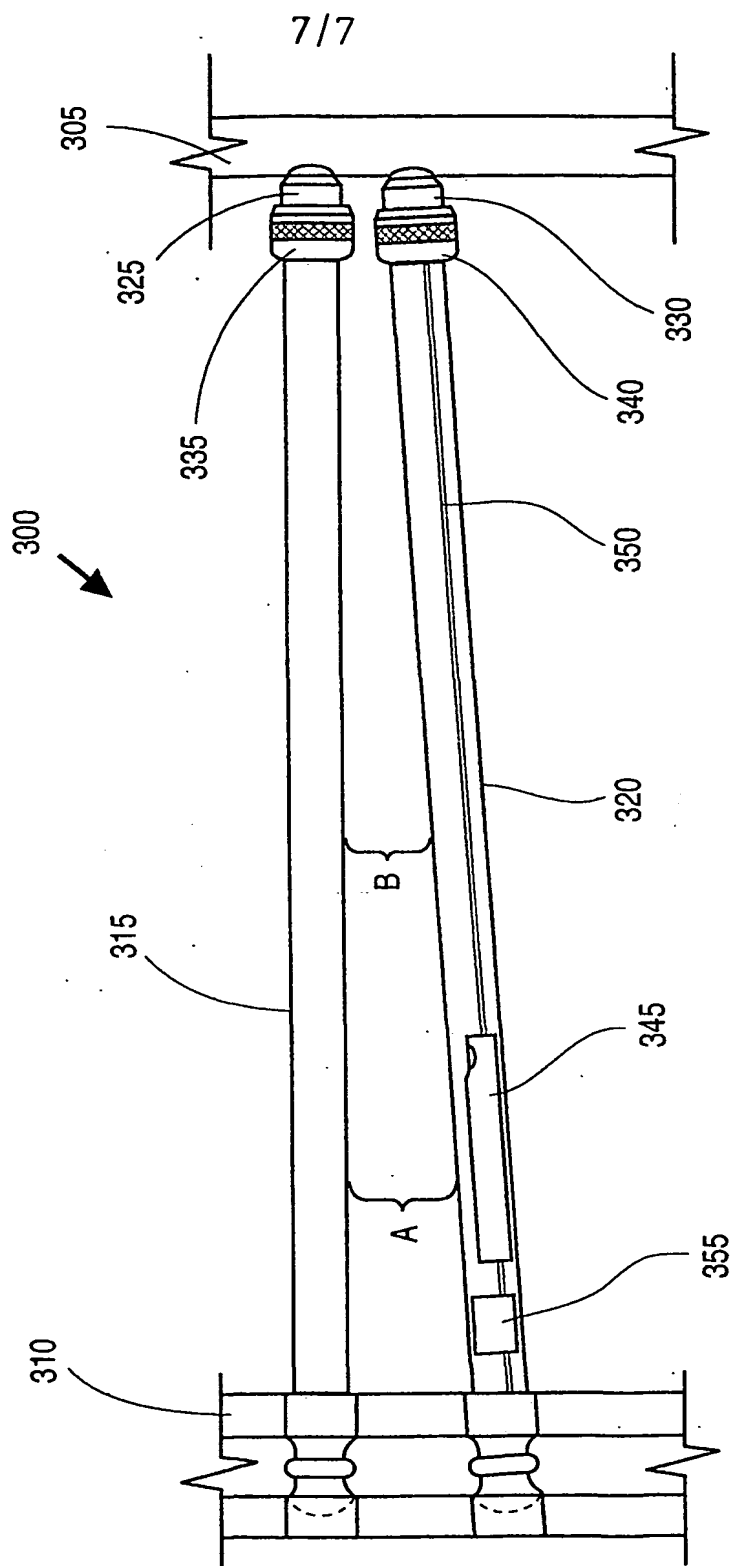

BEST AVAILABLE COPY

THIS PAGE BLANK (USPTO)

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
20 December 2001 (20.12.2001)


PCT

(10) International Publication Number
WO 01/96823 A3

- (51) International Patent Classification⁷: **G01J 1/42, G01N 21/53**
- (21) International Application Number: **PCT/CA01/00877**
- (22) International Filing Date: **18 June 2001 (18.06.2001)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/211,971 16 June 2000 (16.06.2000) US
- (71) Applicant: **TROJAN TECHNOLOGIES INC.**
[CA/CA]; 3020 Gore Road, London, Ontario N5V 4T7 (CA).
- (72) Inventors: **ELLIS, James, W.**; 8 Meadowview Road, London, Ontario N6J 4E6 (CA). **SAGES, Mike**; 880 Kipps Lane, London, Ontario N5Y 5K4 (CA). **VAN DOODEWAARD, Peter**; 18 Marlene Street, St. Thomas, Ontario N5R 1B3 (CA). **VERDUN, Alex**; 542 Cayley Drive, London, Ontario N6H 3G6 (CA).
- (74) Agents: **NASSIF, Omar, A. et al.**; Gowling Lafleur Henderson LLP, Suite 4900, Commerce Court West, Toronto, Ontario M5L 1J3 (CA).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— *with international search report*
- (88) Date of publication of the international search report:
4 April 2002

[Continued on next page]

(54) Title: OPTICAL RADIATION SENSOR SYSTEM AND METHOD FOR MEASURING RADIATION TRANSMITTANCE OF A FLUID

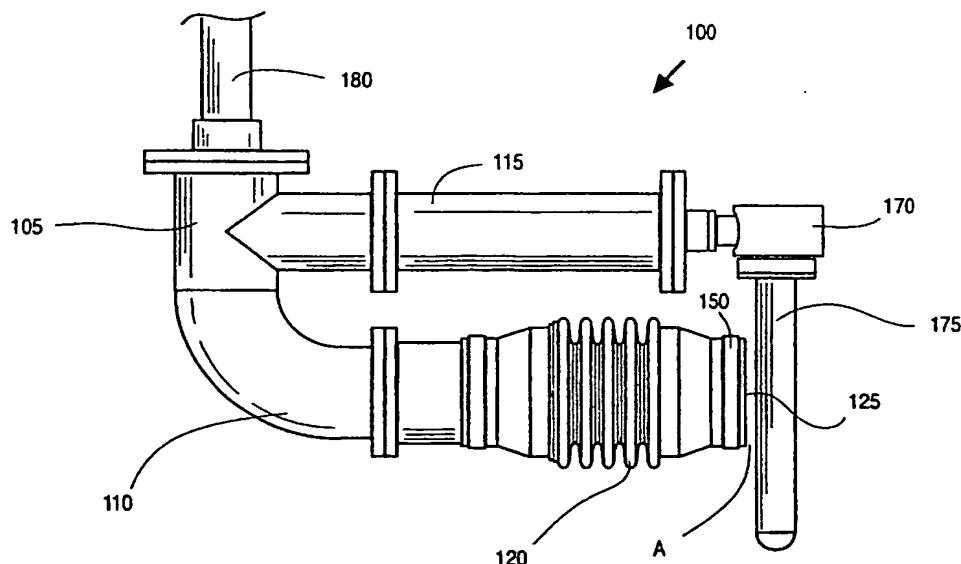

(57) Abstract: An optical radiation sensor device for detecting radiation in a radiation field having a thickness. A preferred embodiment of the device includes a radiation source and a radiation sensor element positioned to receive radiation from the radiation source. A motor (or other motive means) is provided to alter the thickness of the radiation field from a first thickness to a second thickness. The sensor element is capable of detecting and responding to incident radiation from radiation source at the first thickness and at the second thickness. The optical radiation sensor device allows for determination of radiation (preferably ultraviolet radiation) transmittance of a fluid of interest.

BEST AVAILABLE COPY

WO 01/96823 A3



For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 01/00877

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G01J1/42 G01N21/53

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G01J G01N C02F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	NL 1 003 961 C (BERSON MILIEUTECH) 6 March 1998 (1998-03-06) page 6, line 30 -page 7, line 17 figure 5	1-39
X	US 4 290 695 A (SCHMITT HAROLD W) 22 September 1981 (1981-09-22) column 4, line 14 - line 19 column 7, line 30 -column 8, line 48 figures 1,5	1-4,6-9, 11, 13-24, 26-29, 31,33,34

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

21 December 2001

Date of mailing of the international search report

07/01/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Jacquin, J

INTERNATIONAL SEARCH REPORT

International Application No

PCT/CA 01/00877

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 602 162 A (CLUZEL JOHN M ET AL) 22 July 1986 (1986-07-22)	1-4, 6-9, 11, 13, 15-21
A	the whole document	5, 10, 12, 14, 22
X	<p>---</p> <p>PATENT ABSTRACTS OF JAPAN vol. 1998, no. 08, 30 June 1998 (1998-06-30) & JP 10 057954 A (NIPPON PHOTO SCI:KK), 3 March 1998 (1998-03-03) abstract</p> <p>-----</p>	35-39

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CA 01/00877

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
NL 1003961	C	06-03-1998	NL 1003961 C2	06-03-1998
			JP 10115590 A	06-05-1998
US 4290695	A	22-09-1981	NONE	
US 4602162	A	22-07-1986	NONE	
JP 10057954	A	03-03-1998	NONE	

THIS PAGE BLANK (USPTO)